
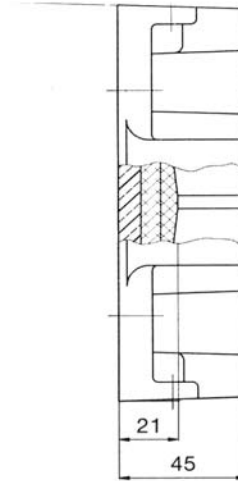


Guide shoe housing part No AH03

Additional Cellasto® Isolation





Allows for vibration damping, self alignment, and an required compression to consider any guide mis-alignment.

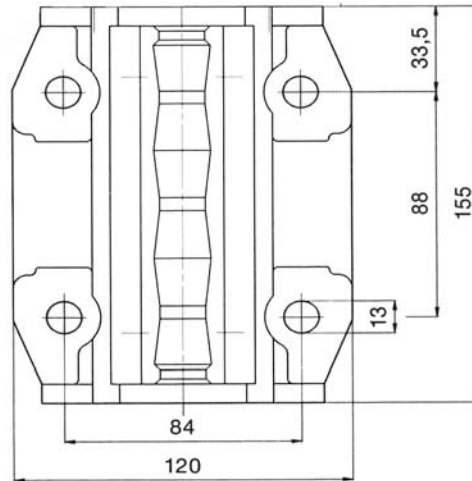

Guide shoe inserts

(Profiled or straight version)

Made either of elastic, abrasion resistant Elastollan® or high load bearing Ultramid® (Special Quality)

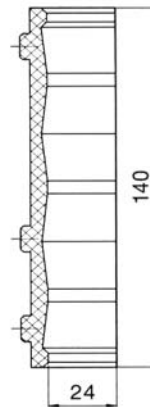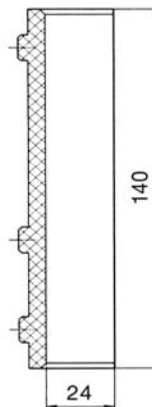

Guide insert selection table

Man Ref	Rail width	Ex Stock	SLS Pt No
	S		
1405	5mm	X	AH03A
1406	6mm		To order
1409	9mm	X	AH04
1410	10mm		To order
1412	12mm		To order
1414	14mm		To order
1416	16mm	X	AH06

Flexible Cellasto Liner 1560

Available as separate component on SLS Pt No **AH02A**

Elastogran



BASF Group

® = registered trademark of Elastogran or rather BASF

GE Elastogran material is standard supply

P = Profiled bearing surface (To order)

U = Ultramid material (To order)

Guide lubricator selection is shown on sheet ref :- 03-05/6